## **High Static Pressure Ducted Indoor Unit**



# TMHS09HFDI

Project Name:

Engineer Name:

Unit Designation:

SubmittedTo:

Date:

Location:

Purshaser:

Schedule No.







### **General Features**

- •High Static Pressure Capability
- Multiple Fan Speeds
- Quiet Operation
- Slim Construction
- Wired Controller
- Internal Condensate Drain Pump
- Internal Condensate Overflow Protection
- Outside Air Capability
- Flexible Return Air From Bottom or Rear
- Wireless Remote Contoller

### Fan

ODU / IDU Type	Axial-flow/Cross-flow
Fan Motor Output (W)	150
Motor/Drive	Direct Drive
IDU Air Flow Rate (CFM)	324/253/212/188

#### **Unit Performance:**

Cooling:	
Capacity (Btu/h)	9,000
Heating:	
Capacity (Btu/h)	9,500
Max. Static Pressure (InWg)	0.6

### **Electrical Specification**

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 14
MCA (A)	5
Cooling Rated Amps (A)	0.4
Heating Rated Amps (A)	0.4
Nominal Cooling Power Input (kW)	0.09
Nominal Heating Power Input (kW)	0.09

## **Unit Specification**

Refrigerant Type	R410A
Condensate Drain Lift (inches)	18
Cooling Sound Pressure (dB(A))	36/30/27/25
Heating Sound Pressure (dB(A))	46/40/37/35
Net Weight (lbs)	71
Dehumidifying (Pint/h)	1.69

### **Piping**

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	3/8
Connection Method	Flared








AHRI certification Ref #



### Wc = inches of water column

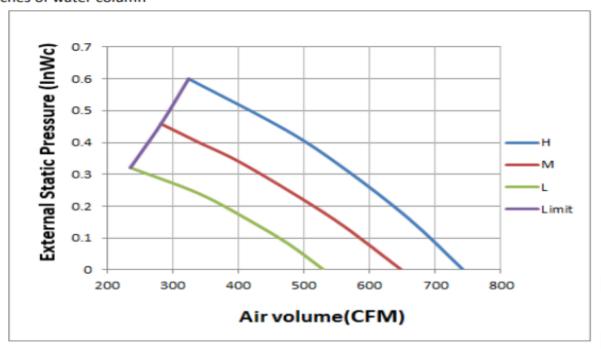



#### Notes

- 1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
- 2. Power wiring cable size must comply with applicable national and local codes.
- 3. Test conditions are based on AHRI 210/240.

# **Outline Dimension Diagram**





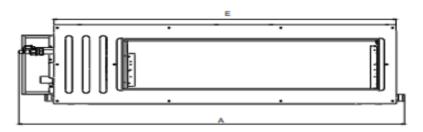

Model	Α	В	С	D	E
09/12K	32 43/64	29 11/16	11 13/16	31 11/32	27 9/16
18/21/24K	44 31/64	29 11/16	11 13/16	43 7/64	39 3/8

Approved	By:
----------	-----

Signature Date



315 Boulevard Industriel, Châteauguay, Contact: +1 (450) 698-4000 QC, Canada J6J 4Z2

info@tosotamerica.com tosotamerica.com