

208~230V 4-Way Cassette

Model:TVRF-IE4WC42KHP






Specifications	Unit	Parameter
Model	—	TVRF-IE4WC42KHP
Performance		
Rated Cooling Capacity	kBtu/h	42
Rated Heating Capacity	kBtu/h	47
Sound Pressure Level	dB(A)	38/41/43
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1
Fan		
Type x Quantity	—	Centrifugal×1
Air Flow Volume	CFM	680/885/1095
Fan Motor Running Current	A	0.9
Fan Motor Power Output	W	75
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Connection method	—	Flare Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	320×840×840/ (12-5/8×33×33)
Net Weight	kg/lbs	32.5/72
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Specifications subject to change without prior notice.

Outline and Physical Dimensions of TVRF-IE4WC42KHP.

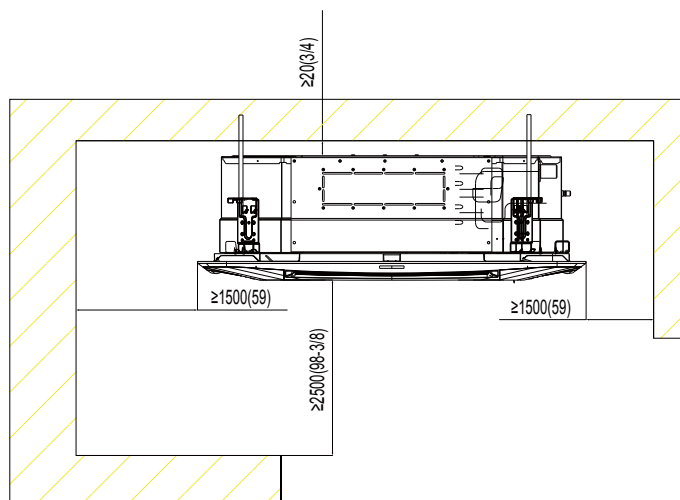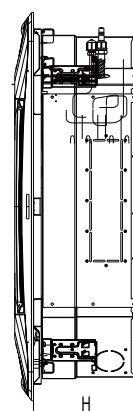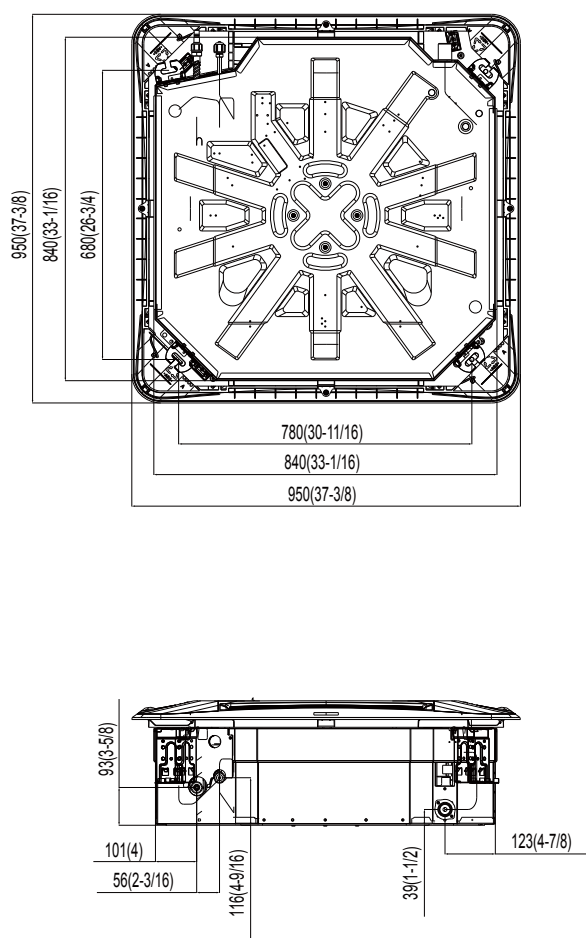

model	H
TVRF-IE4WC42KHP	340 (13-3/8)

Unit:mm(in.)