

208~230V Compact 4-Way Cassette

Model:TVRF-IEC4WC07KHP







Specifications	Unit	Parameter
Model	—	TVRF-IEC4WC07KHP
Performance		
Rated Cooling Capacity	kBtu/h	7.5
Rated Heating Capacity	kBtu/h	8.5
Sound Pressure Level	dB(A)	35/39/41
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	2
Fan		
Type x Quantity	—	Centrifugal×1
Air Flow Volume	CFM	235/295/355
Fan Motor Running Current	A	< 1
Fan Motor Power Output	W	45
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ9.52/Φ3/8
	Liquid(mm/inch)	Φ6.35/Φ1/4
Connection method	—	Flare Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	240×596×596 (9-1/2×23-1/2×23-1/2)
Net Weight	kg/lbs	22/49
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Specifications subject to change without prior notice.

Outline and Physical Dimensions of TVRF-IEC4WC07KHP.

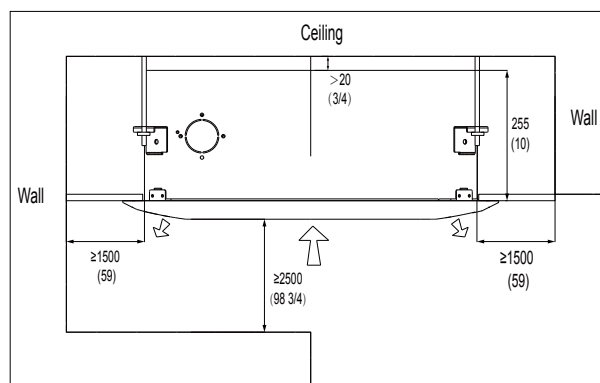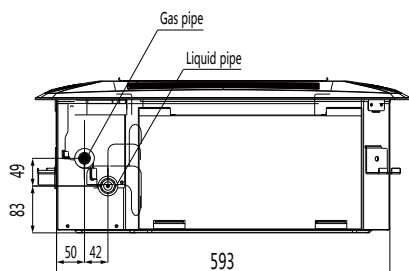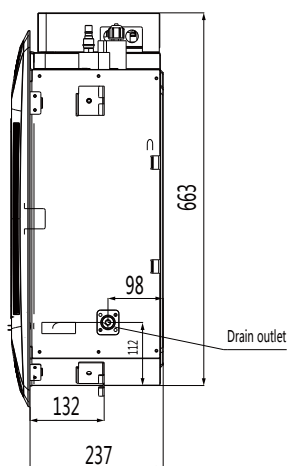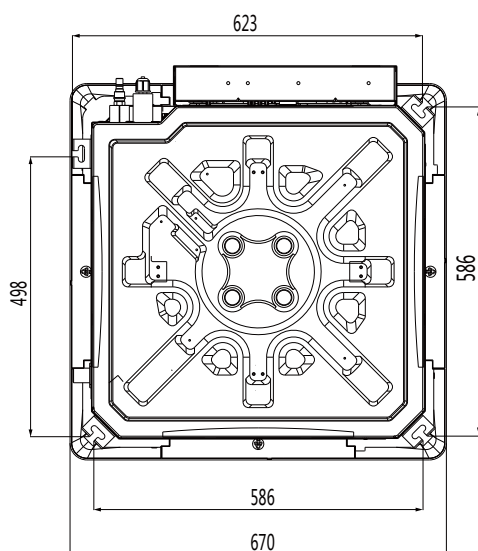

Model	Gas pipe diameter	Liquid pipe diameter
TVRF-IEC4WC07KHP	9.52	6.35

Unit:mm(in.)