


## 208~230V Low ESP Fan Coil

**Model:TVRF-IERLESPD18KHP**

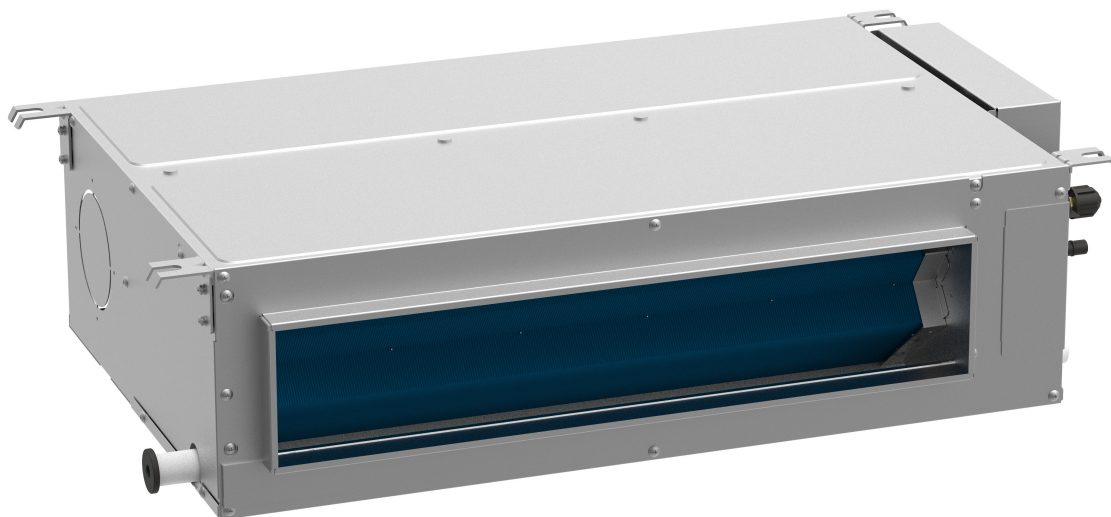


| Specifications                       | Unit                 | Parameter                              |
|--------------------------------------|----------------------|----------------------------------------|
| Model                                | —                    | TVRF-IERLESPD18KHP                     |
| <b>Performance</b>                   |                      |                                        |
| Rated Cooling Capacity               | kBtu/h               | 18                                     |
| Rated Heating Capacity               | kBtu/h               | 20                                     |
| Sound Pressure Level                 | dB(A)                | 29/31/35                               |
| <b>Electrical Data</b>               |                      |                                        |
| Power Supply                         | Voltage,Phase, Hertz | 208/230,1,60                           |
| Maximum Overcurrent Protection (MOP) | A                    | 15                                     |
| Minimum Circuit Amps (MCA)           | A                    | 1                                      |
| <b>Fan</b>                           |                      |                                        |
| Type × Quantity                      | —                    | Centrifugal x3                         |
| Air Flow Volume                      | CFM                  | 324/412/500                            |
| ESP                                  | Pa                   | 0~30                                   |
| Fan Motor Running Current            | A                    | 0.8                                    |
| Fan Motor Power Output               | W                    | 60                                     |
| <b>Refrigerant Piping</b>            |                      |                                        |
| Connection Pipe                      | Gas(mm/inch)         | Φ15.9/Φ5/8                             |
|                                      | Liquid(mm/inch)      | Φ9.52/Φ3/8                             |
| Connection method                    | —                    | Flare Connection                       |
| Refrigerant                          | —                    | R410A                                  |
| <b>Dimension/Weight</b>              |                      |                                        |
| Dimensions (H×W×D)                   | mm/inch              | 200×1010×462<br>(7-7/8×39-3/4×18-3/16) |
| Net Weight                           | kg/lbs               | 25/55                                  |
| <b>Other</b>                         |                      |                                        |
| Safety Certification                 | —                    | ETL                                    |

|                       |  |       |  |
|-----------------------|--|-------|--|
| Job Name:             |  | Date: |  |
| System Reference No.: |  |       |  |
| Engineer Signature:   |  |       |  |

Specifications subject to change without prior notice.

## Outline and Physical Dimensions of TVRF-IERLESPD18KHP.

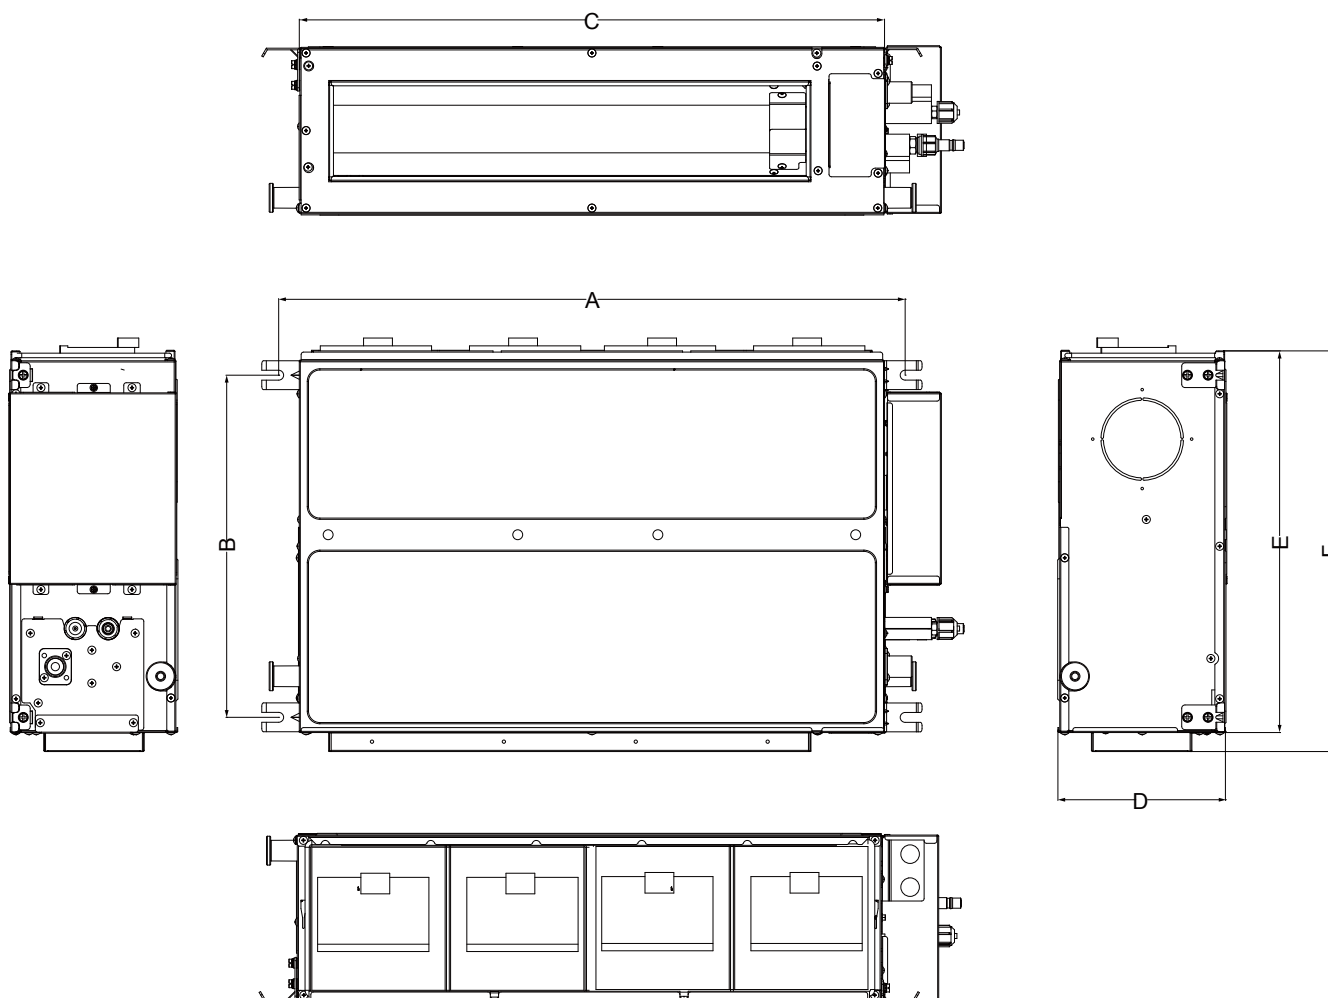

| Item Model         | Unit | A      | B      | C      | D     | E       | F      |
|--------------------|------|--------|--------|--------|-------|---------|--------|
| TVRF-IERLESPD18KHP | mm   | 1060   | 415    | 1010   | 200   | 462     | 486    |
|                    | inch | 41-3/4 | 16-3/8 | 39-3/4 | 7-7/8 | 18-3/16 | 19-1/8 |

Unit:mm(in.)