

Lomo16 Heat Pump**TOSOT****MODEL: TW09HQ1B8A**

Project Name:

Location:

Engineer Name:

Purshaser:

Unit Designation:

Schedule No.

SubmittedTo:

Date:

**General Features**

- Low Ambient Cooling to 5 °F
- Multiple Fan Speeds
- Memory Function
- Fan Delay Function
- Intelligent Pre-heating / Defrost
- Control lock

- Smart 1 Hertz Inverter Technology
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection
- LED display

Unit Performance:

Cooling:	-	-
Capacity (Min Rated Max, Btu/h)	2,764-9,000-10,918	
SEER		16
EER		9.55
Heating:	-	-
Capacity (Min Rated Max, Btu/h)	2,081-9,600-12,283	
HSPF		9
COP (W/W)		3.3

Compressor

Cooling Operation Ambient temp. Range	5~115 F
Heating Operation Ambient temp. Range	-5~75 F
Compressor Type	Swing
Compressor RLA (A)	12.6
Crankcase Heater	Yes

Electrical Specification

Power Supply	115V/1ph/60Hz
Communications Wire Size	AWG 14
MOP (A)	25
MCA (A)	17
Compressor RLA (A)	12.6
Indoor Fan Motor RLA (A)	0.2
Outdoor Fan Motor RLA(A)	0.24
Nominal Cooling Power Input (kW)	0.9
Nominal Heating Power Input (kW)	0.8

Unit Specification

Refrigerant Type	R410A
Refrigerant Charge (oz)	24.7
ODU Sound Pressure (dB(A))	52
IDU Sound Pressure (dB(A))	43/38/34/28
ODU Net Weight (lbs)	65
IDU Net Weight (lbs)	20
Dehumidifying (Pint/h)	1.69

Fan

ODU / IDU Type	Axial-flow / Cross-flow
Fan Motor Output (W)	30
Motor/Drive	Direct Drive
ODU Max Air Flow Rate (CFM)	942
IDU Air Flow Rate (CFM)	171 / 318

Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	3/8
Additional Refrigerant (oz./ft.)	0.215
Max Pipe Length (ft.)	49.2
Piping Length (with factory charge, ft.)	24.6
Max Elevation (ft.)	49

AHRI certification Ref #



Capacity Variation Ratio According to Temperature



COOLING PERFORMANCE (BtuH)*								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68F DB (20C)		73F DB (23C)		80F DB (27C)		82F DB (28C)	
	57F WB (14C)		61F WB (16C)		67F WB (19C)		68F WB (20C)	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
0°F	5,669	4,446	5,990	4,695	6,716	5,268	6,939	5,443
5°F	5,742	4,503	6,066	4,756	6,846	5,369	7,074	5,548
14°F	5,889	4,619	6,219	4,877	7,107	5,573	7,344	5,759
23°F	6,291	4,935	6,729	5,278	7,710	6,047	7,967	6,249
32°F	7,629	5,983	8,160	6,400	8,937	7,007	9,235	7,241
41°F	8,640	6,776	9,180	7,199	9,810	7,694	10,137	7,951
50°F	8,538	6,697	9,081	7,123	9,720	7,624	10,044	7,878
59°F	8,328	6,530	8,868	6,956	9,630	7,554	9,951	7,806
68°F	8,118	6,366	8,658	6,792	9,450	7,412	9,765	7,659
77°F	7,911	6,205	8,448	6,624	9,270	7,272	9,579	7,514
86°F	7,683	6,026	8,220	6,445	9,000	7,059	9,300	7,294
95°F	7,497	5,880	8,031	6,299	8,883	6,968	9,179	7,200
104°F	7,311	5,734	7,845	6,153	8,766	6,877	9,058	7,106
113°F	6,936	5,439	7,470	5,859	8,394	6,582	8,674	6,801
115°F	6,915	5,423	7,440	5,835	8,361	6,557	8,640	6,775
HEATING PERFORMANCE (BtuH)*								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68F DB (20C)		73F DB (23C)		80F DB (27C)		86F DB (30C)	
	57F WB (14C)		61F WB (16C)		67F WB (19C)		72F WB (22C)	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
-4°F	5,037	5,037	4,989	4,989	4,905	4,905	4,707	4,707
0°F	5,457	5,457	5,406	5,406	5,316	5,316	5,097	5,097
6°F	5,757	5,757	5,703	5,703	5,607	5,607	5,376	5,376
10°F	5,997	5,997	5,940	5,940	5,841	5,841	5,601	5,601
16°F	6,177	6,177	6,120	6,120	6,018	6,018	5,769	5,769
19°F	6,300	6,300	6,237	6,237	6,135	6,135	5,880	5,880
24°F	6,999	6,999	6,939	6,939	6,834	6,834	6,582	6,582
32°F	7,815	7,815	7,755	7,755	7,650	7,650	7,398	7,398
41°F	8,748	8,748	8,688	8,688	8,586	8,586	8,331	8,331
43°F	8,982	8,982	8,922	8,922	8,817	8,817	8,565	8,565
47°F	9,795	9,795	9,696	9,696	9,528	9,528	9,114	9,114
53°F	9,894	9,894	9,792	9,792	9,621	9,621	9,204	9,204
59°F	10,119	10,119	10,017	10,017	9,840	9,840	9,414	9,414
64°F	10,335	10,335	10,230	10,230	10,050	10,050	9,615	9,615
70°F	10,530	10,530	10,422	10,422	10,242	10,242	9,798	9,798
75°F	10,677	10,677	10,569	10,569	10,383	10,383	9,933	9,933
* Maximum system capacity TC- Total Capacity (BtuH) SHC- Sensible Capacity (BtuH)								

Lomo16 Heat Pump





TOSOT

MODEL: TW09HQ1B8A

Outline Dimension Diagram

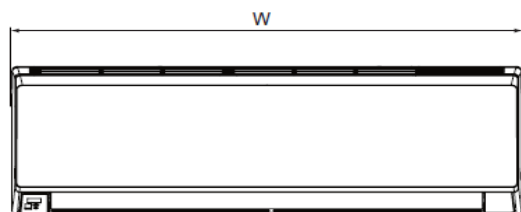

W	H	D
31 1/9	10 5/6	7 7/8

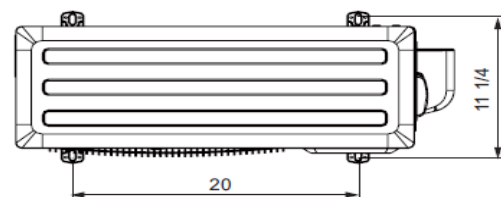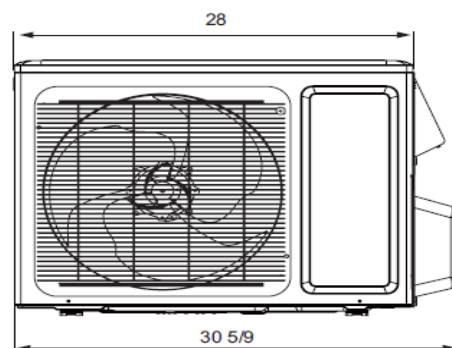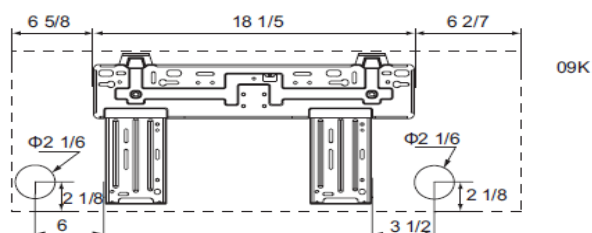

Approved By:

Signature

Date

TOSOT

315 Boulevard Industriel, Châteauguay, QC, Canada J6J 4Z2

Contact: +1 (450) 698-4000
info@tosotamerica.com
tosotamerica.com