

Multi zone inverter mini split

TOSOT

MODEL: TW24HQ2C2D/I

Project Name:

Location:

Engineer Name:

Purshaser:

Unit Designation:

Schedule No.

Submitted To:

Date:

General Features

- Multiple Fan Speeds
- Memory Function
- Fan Delay Function
- Fan Delay Function



- Gold Fin Condenser
- Low Voltage Start-up
- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection

Unit Performance:

Nominal Cooling Capacity (Btu/h)	22,000
Nominal Heating Capacity (Btu/h)	23,000

Set Temperature

Cooling (°F)	61~86
Heating (°F)	61~86

Piping

Liquid Line (in)	1/4
Gas Line (in)	5/8

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	14 AWG
Rated Amps (A)	0.38

Fan

Type	Cross-flow
Quantity	1
Motor/Drive	Direct drive
Air Flow Rate (CFM)	530 / 706

Unit Specification

Refrigerant Type	R410A
Refrigerant Control	EEV
Sound Pressure (dB(A))	36 / 48
Primary Filter	Yes
Net Weight (lbs)	34.2
Dehumidification (Pt/h)	4.23



GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor


MOP - Maximum Overcurrent Protection

Multi zone inverter mini split

TOSOT

MODEL: TW24HQ2C2D/I

Outline Dimension Diagram

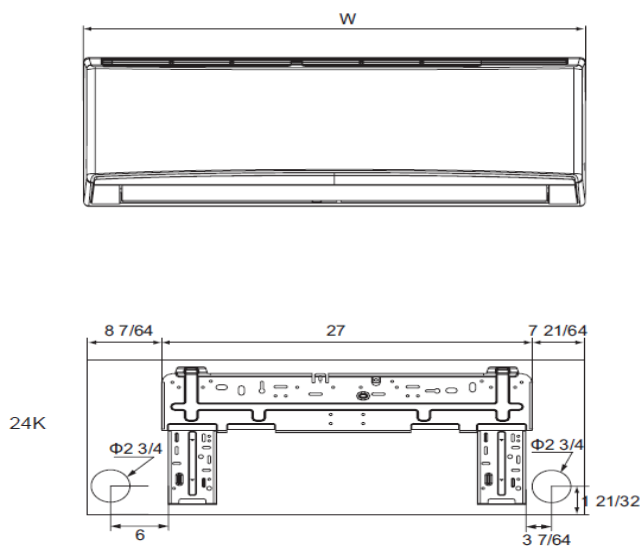

Dimensions		
W	H	D
42 7/16"	12 51/64"	9 11/16"

Approved By:

Signature

Date

TOSOT

315 Boulevard Industriel, Châteauguay, QC, Canada J6J 4Z2
Contact: +1 (450) 698-4000
info@tosotamerica.com
tosotamerica.com