

Wallmount**TOSOT****MODEL: TVRF-IEWM07KHP**

Project Name:

Location:

Engineer Name:

Purshaser:

Unit Designation:

Schedule No.

SubmittedTo:

Date:

Indoor VRF SYSTEM FEATURES

- * Comfortable And Balanced Airflow
- * Cold Air Prevention Design

- * Triple Defenders For Better Purification.
- * Multiple Protections




<u>Specifications</u>		Model Name
Unit Type		TVRF-IEWM07KHP
Cooling Capacity	Btu/h	7,500
Heating Capacity	Btu/h	8,500
External Dimensions (WxHxD)	In.	33-1/4 x 10-7/8 x 7-1/8
	mm	843 x 275 x 180
Net Weight	Lbs. / Kg	22/10
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	2.20
Power Heating Consumption	kW	2.50
Current Cooling	A	0.2
Current Heating	A	0.2
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fu	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	3/8 - 9.52
Sound Pressure Level	dB(A)	38
<u>Fan</u>		
Type x Quantity		Cross-flow x 1
Airflow Rate	CFM	295
<u>Motor</u>		
Motor Type x Quantity		PG x 1
Motor Output	kW	0.02
Refrigerant		R410A
Coil Type		Direct Drive
Unit Color		white

Wallmount

TOSOT

MODEL: TVRF-IEWM07KHP

Outline Dimension Diagram

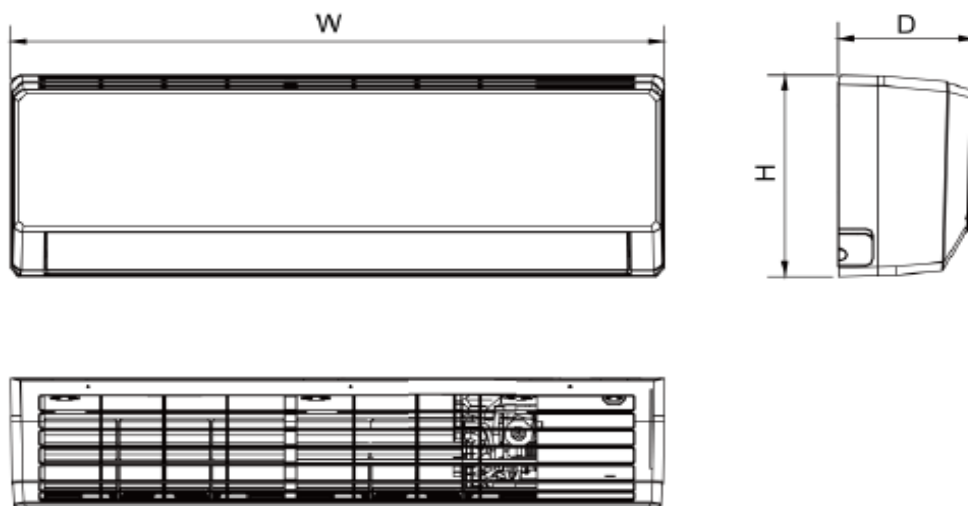

		W	H	D
TVRF-IEWM07KHP	mm	843	275	180
	inch	33 1/4	10 7/8	7 1/8

Approved By:

Signature

Date

TOSOT

315 Boulevard Industriel, Châteauguay,
QC, Canada J6J 4Z2

Contact: +1 (450) 698-4000
info@tosotamerica.com
tosotamerica.com