

**Wallmount****TOSOT****MODEL: TVRF-IEWM18KHP**

Project Name:

Location:

Engineer Name:

Purchaser:

Unit Designation:

Schedule No.

Submitted To:

Date:

**Indoor VRF SYSTEM FEATURES**

- \* Comfortable And Balanced Airflow,
- \* Cold Air Prevention Design.

- \* Triple Defenders For Better Purification.
- \* Multiple Protections




<b><u>Specifications</u></b>		Model Name
Unit Type		TVRF-IEWM18KHP
Cooling Capacity	Btu/h	18,000
Heating Capacity	Btu/h	20,000
External Dimensions (WxHxD)	In.	37 x 11-3/4 x 7-7/8
	mm	940 x 298 x 200
Net Weight	Lbs. / Kg	28/12.5
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	5.20
Power Heating Consumption	kW	5.80
Current Cooling	A	0.21
Current Heating	A	0.21
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Full Load	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	1/2 - 12.7
Sound Pressure Level	dB(A)	44
<b><u>Fan</u></b>		
Type x Quantity		Cross-flow x 1
Airflow Rate	CFM	370
<b><u>Motor</u></b>		
Motor Type x Quantity		PG x 1
Motor Output	kW	0.02
Refrigerant		R410A
Coil Type		Direct Drive
Unit Color		white

Wallmount

**TOSOT**

MODEL: TVRF-IEWM18KHP

Outline Dimension Diagram

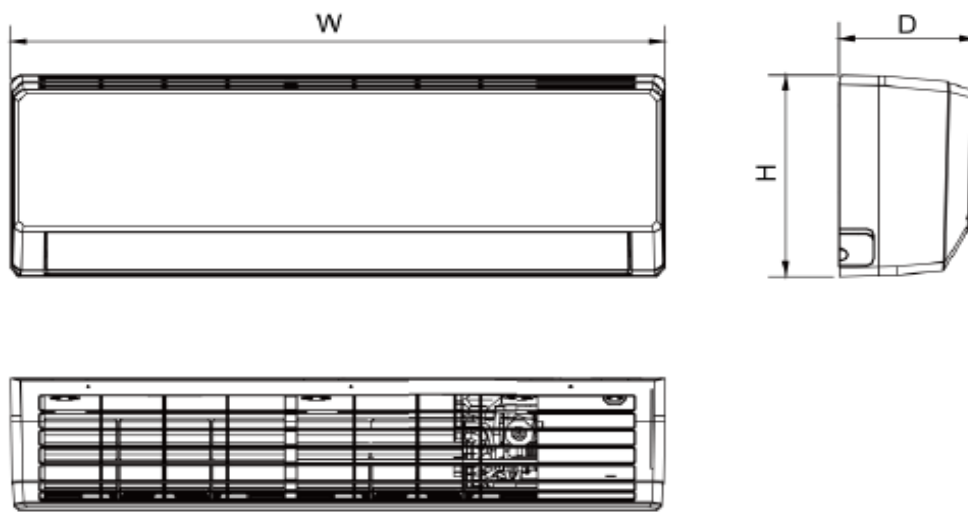

		W	H	D
TVRF-	mm	940	298	200
IEWM18KHP	inch	37	11 3/4	7 7/8

Approved By:

Signature

Date

**TOSOT**

315 Boulevard Industriel, Châteauguay,  
QC, Canada J6J 4Z2

Contact: +1 (450) 698-4000  
[info@tosotamerica.com](mailto:info@tosotamerica.com)  
[tosotamerica.com](http://tosotamerica.com)