

Wallmount**TOSOT****MODEL: TVRF-IEWM24KHP**

Project Name:
Engineer Name:
Unit Designation:
SubmittedTo:
Date:

Location:
Purshaser:
Schedule No.

Indoor VRF SYSTEM FEATURES

- * Comfortable And Balanced Airflow,
- * Cold Air Prevention Design.

- * Triple Defenders For Better Purification.
- * Multiple Protections




<u>Specifications</u>		Model Name
Unit Type		TVRF-IEWM24KHP
Cooling Capacity	Btu/h	24,000
Heating Capacity	Btu/h	25,500
External Dimensions (WxHxD)	In.	39-5/8 x 8-3/4 x 12-1/2
	mm	1008 x 319 x 221
Net Weight	Lbs. / Kg	33/15
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	7
Power Heating Consumption	kW	7.5
Current Cooling	A	0.31
Current Heating	A	0.31
Minimum Circuit Ampacity (MCA)	A	1
Maximum Overcurrent Protection (MOCP)	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.87
Sound Pressure Level	dB(A)	44
<u>Fan</u>		
Type x Quantity		Cross-flow x 1
Airflow Rate	CFM	440
<u>Motor</u>		
Motor Type x Quantity		PG x 1
Motor Output	kW	0.035
Refrigerant		R410A
Coil Type		Direct Drive
Unit Color		white

Wallmount

TOSOT

MODEL: TVRF-IEWM24KHP

Outline Dimension Diagram

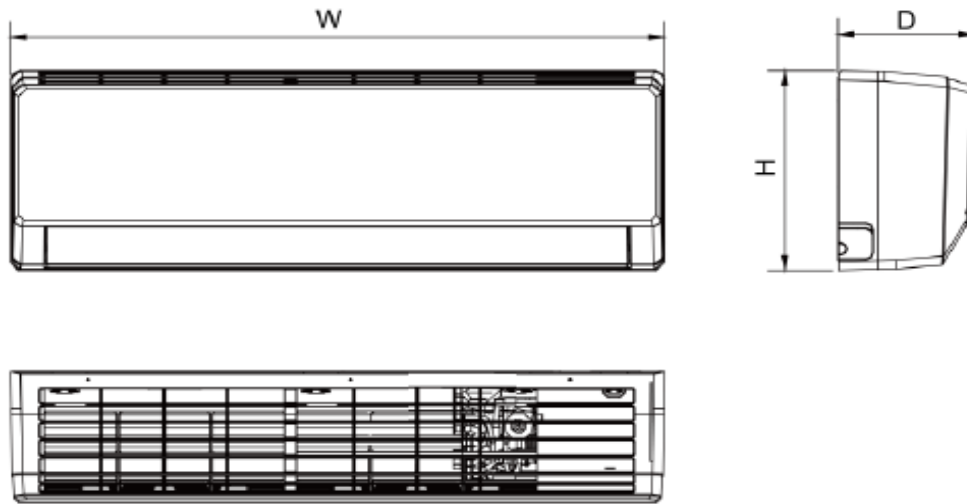

		W	H	D
TVRF-	mm	1008	221	319
IEWM24KHP	inch	39 5/8	8 3/4	12 1/2

Approved By:

Signature

Date

TOSOT

315 Boulevard Industriel, Châteauguay, QC, Canada J6J 4Z2

Contact: +1 (450) 698-4000
info@tosotamerica.com
tosotamerica.com