

**TQSDT**

208~230V 100% Fresh Air Handler Unit

Model:TVRF-IEVFAH48KHP




Specifications	Unit	Parameter
Model	—	TVRF-IEVFAH48KHP
Performance		
Rated Cooling Capacity	kBtu/h	48
Rated Heating Capacity	kBtu/h	34
Sound Pressure Level	dB(A)	40~50
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1.7
Fan		
Type x Quantity	—	Centrifugal ×3
Air Flow Volume	CFM	706.2
ESP	Pa	150/50~200
Fan Motor Running Current	A	1.3
Fan Motor Power Output	W	350
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Connection method	—	Flare Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	300×1400×700/ (11-13/16×55-1/8×27-9/16)
Net Weight	kg/lbs	54/119
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Specifications subject to change without prior notice.

Outline and Physical Dimensions of TVRF-IEVFAH48KHP.

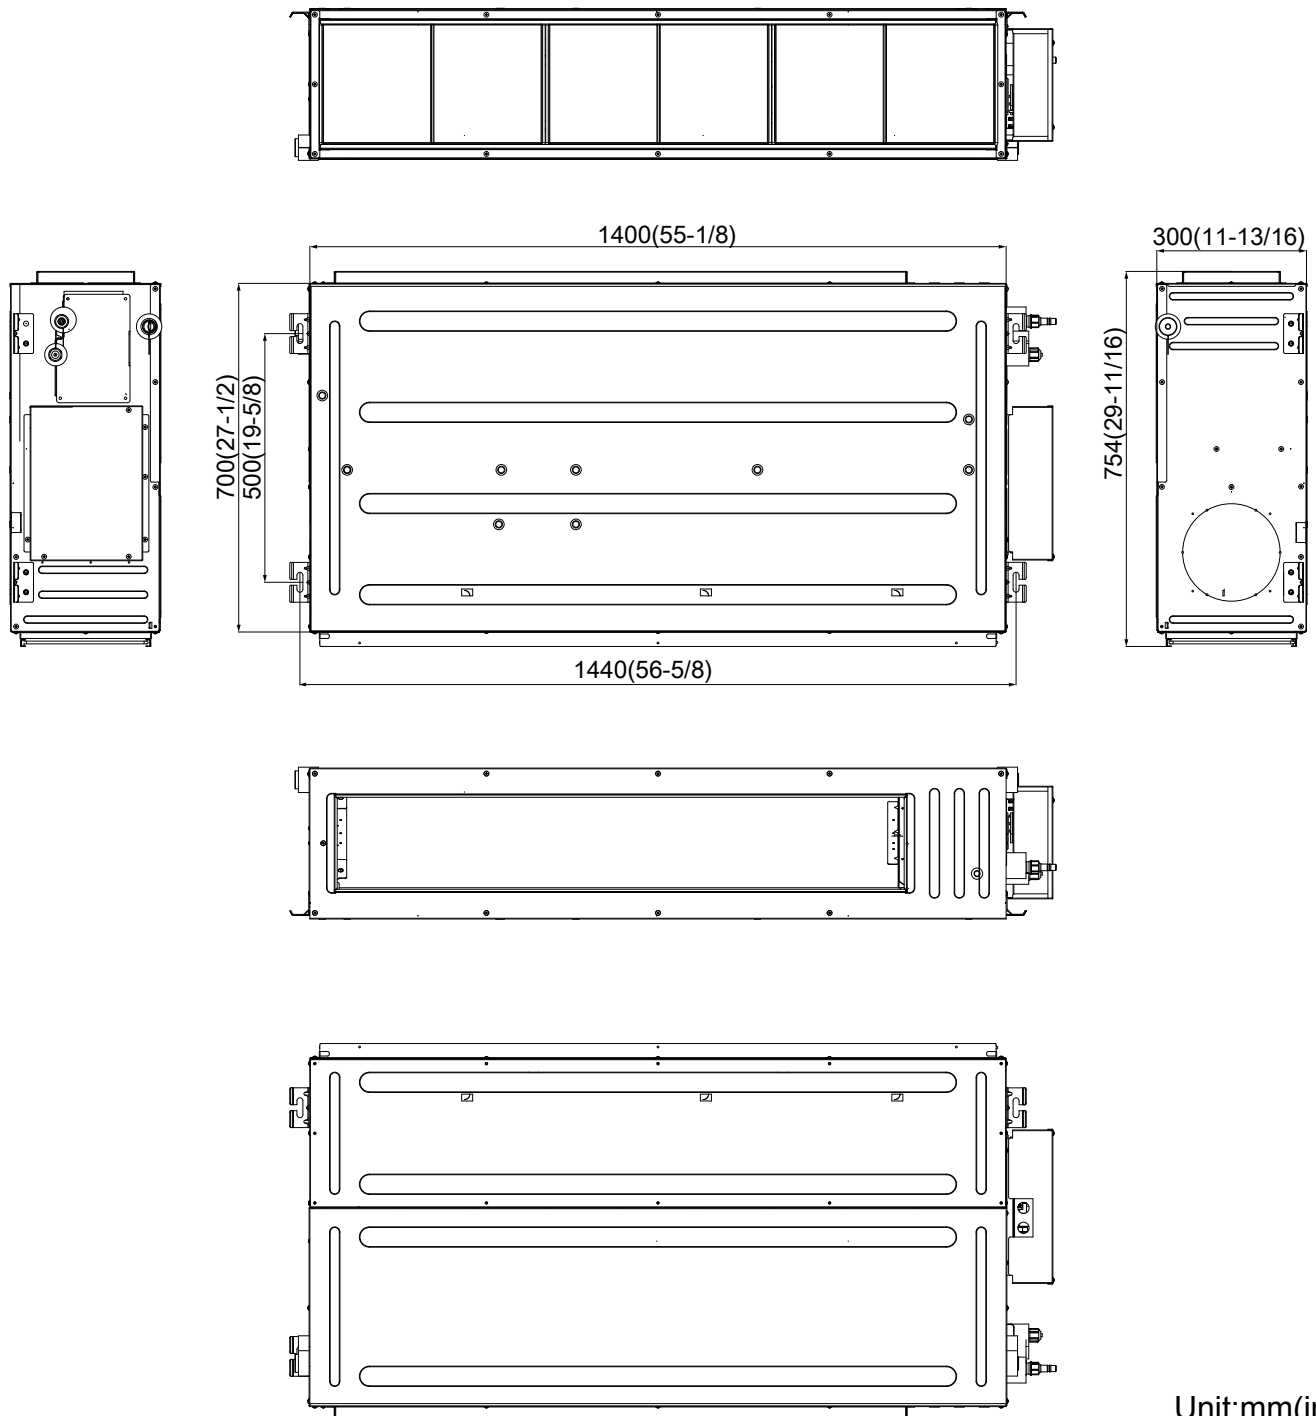

Unit:mm(in.)