

Lomo16 Cooling Only

TOSOT

MODEL: TW12CQ1C8D

Project Name:

Engineer Name:

Unit Designation:

Submitted To:

Date:

Location:

Purchaser:

Schedule No.

General Features

- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection
- Memory Function
- LED display



- Smart 1 Hertz Inverter Technology
- Low Ambient Cooling to 5 °F
- Multiple Fan Speeds
- Fan Delay Function
- Intelligent Pre-heating / Defrost
- Control lock

Unit Performance:

Cooling:	-	-
Capacity (Min Rated Max, Btu/h)	3,753-12,000-12,500	
SEER	16	
EER	9.23	
Heating:	-	-
Capacity (Min Rated Max, Btu/h)	N/A	
HSPF	N/A	
COP (Btu/h)/w)	N/A	

Compressor

Cooling Operation Ambient temp. Range	5-115 °F
Heating Operation Ambient temp. Range	N/A
Compressor Type	Swing
Compressor RLA (A)	4
Crankcase Heater	Yes

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 14
MOP (A)	15
MCA (A)	9
Cooling Rated Amps (A)	6
Heating Rated Amps (A)	N/A
Compressor RLA (A)	4
Indoor Fan Motor RLA(A)	0.21
Outdoor Fan Motor RLA(A)	0.36
Nominal Cooling Power Input (kW)	1.3
Nominal Heating Power Input (kW)	N/A

Unit Specification

Refrigerant Type	R410A
Refrigerant Charge (oz)	30
ODU Sound Pressure (dB(A))	53
IDU Sound Pressure (dB(A))	45/39/35/29
ODU Net Weight (lbs)	70.6
IDU Net Weight (lbs)	23.1

Fan

ODU / IDU Type	Axial-flow / Cross-flow
Fan Motor Output(W)	30
Motor/Drive	Direct Drive
ODU Max Air Flow Rate (CFM)	1599
IDU Air Flow Rate (CFM)	194 / 400


Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	3/8
Additional Refrigerant (oz./ft.)	0.2
Max Pipe Length (ft.)	49.2
Piping Length (with factory charge, ft.)	24.6
Max Elevation (ft.)	49



AHRI certification Ref #

Capacity Variation Ratio According to Temperature

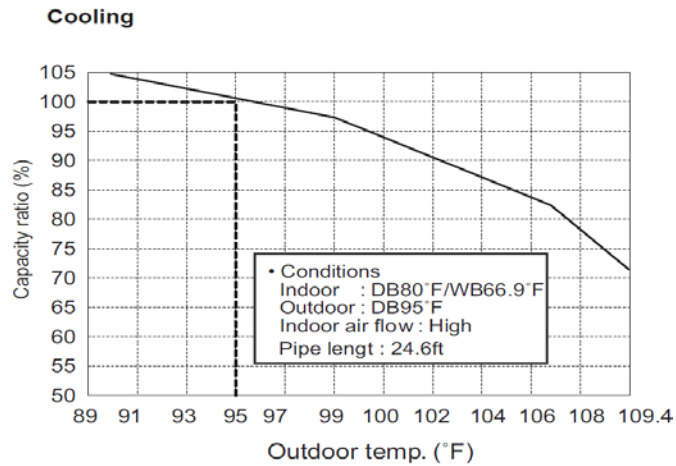

GLOSSARY

SEER Seasonal Energy Efficiency Ratio

EER Energy Efficiency Ratio

HSPF Heating Seasonal Performance Factor

MOP Maximum Overcurrent Protection



MCA Minimum Circuit Ampacity

Lomo16 Cooling Only





TOSOT

MODEL: TW12CQ1C8D

Outline Dimension Diagram

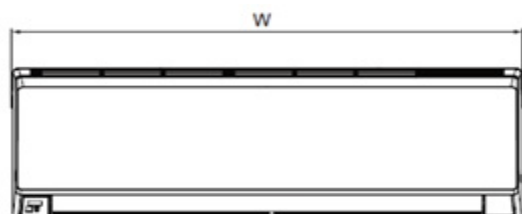

W	H	D
33 1/4	11 3/8	8 2/9

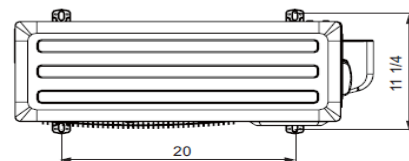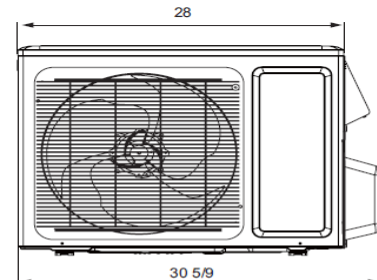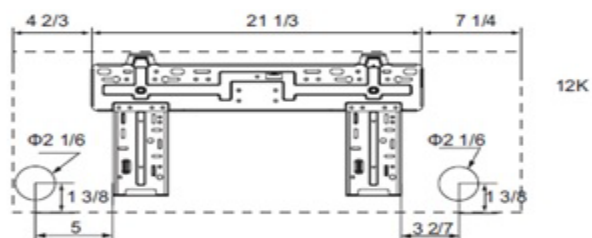

Approved By:

Signature

Date

TOSOT

315 Boulevard Industriel, Châteauguay, QC, Canada J6J 4Z2

Contact: +1 (450) 698-4000

info@tosotamerica.com

tosotamerica.com